



GLOBEFAN TECHNOLOGY CO., LTD.


No. 28, 3 Lane Zhongxinjin Road, Jin Industry District Shoei Koou Village,

Da Laang Town, Dungguan City, Guangdong Province, China


Tel : +86 769 83182898~9

Fax : +86 769 83182897

◆ DIMENSIONS DRAWING

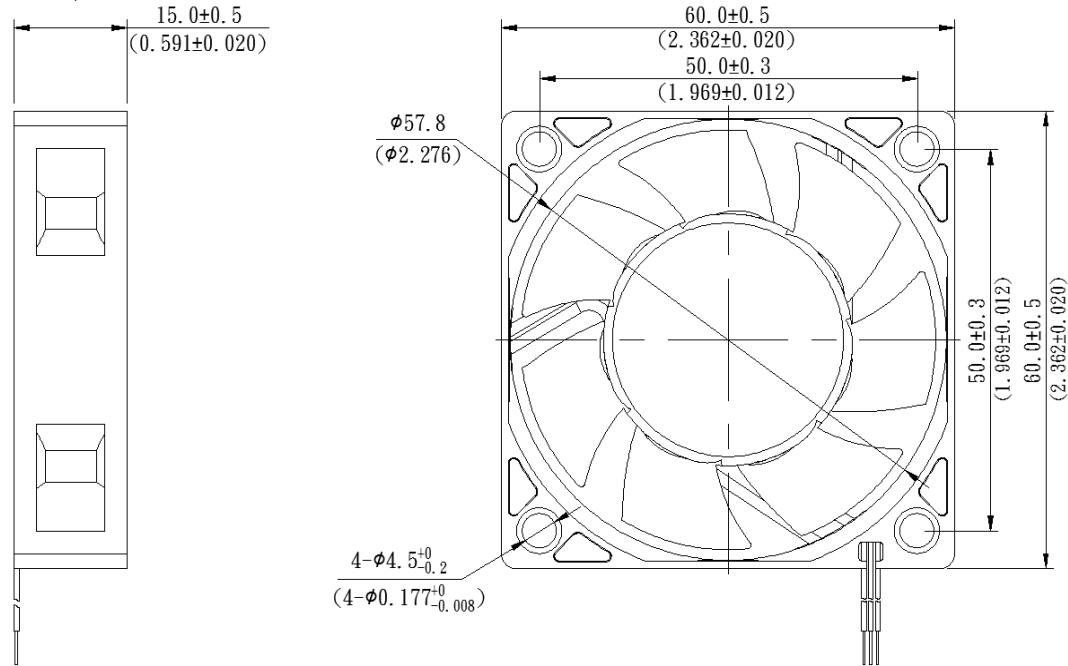

◆ 60x60x15mm DC Axial Fan P/Q Curves (At rated speed)A Version

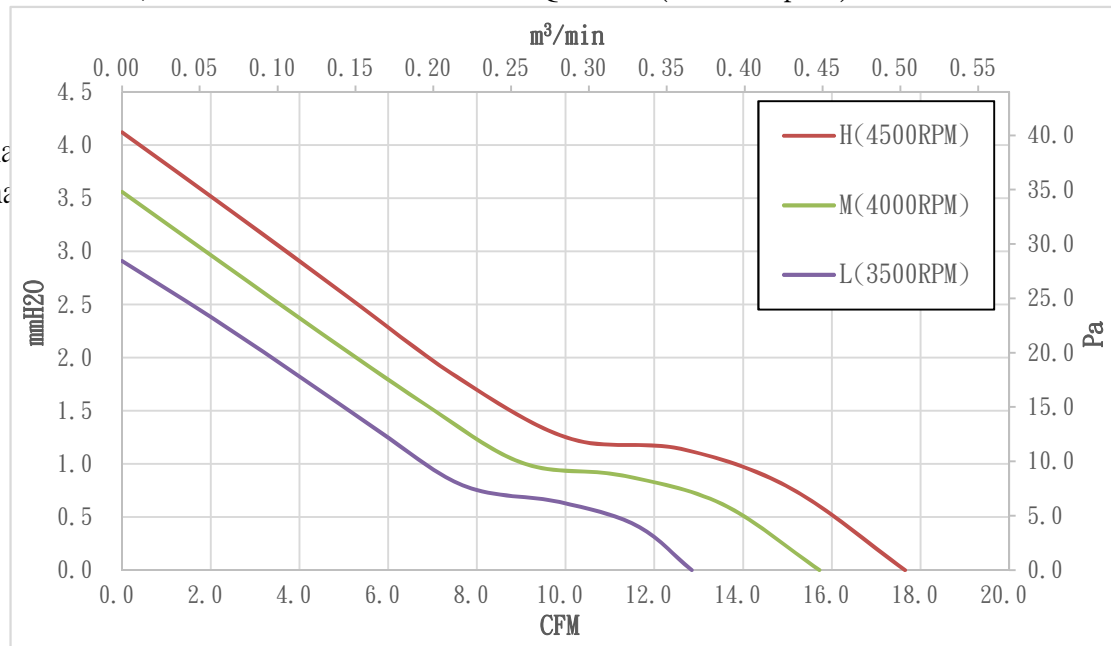

* BEARING TYPE

- Ball bearing
- Sleeve bearing

* Electrical Function

- Frequency Generator Output Signal
- RD (Lock Detection) Output Signal

* Material

Impeller: Plastic (PBT 30%GF)
 Frame : Plastic (PBT 30%GF)

* Lead wires

UL1007 26AWG or Equivalent
 Black Wire Negative (-)
 Red or Yellow Wire Positive (+)
 White Wire Signal (FG)

* Weight :39.4g (1.39 oz)

MODEL	Operating Voltage Range	Rated Voltage	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
Part No.	VDC	VDC	Amp	Watts	R.P.M	m ³ /min	CFM	mmH ₂ O	Pa	dB(A)
B/S0601512H	6 ~13.8	12	0.15	1.8	4500±10%	0.50	17.65	4.12	40.40	32.1
B/S0601512M	6 ~13.8	12	0.12	1.4	4000±10%	0.44	15.72	3.56	34.91	30.7
B/S0601512L	6 ~13.8	12	0.10	1.2	3500±10%	0.36	12.84	2.91	28.54	27.0

* Function type is optional.

* The max. air flow and speed are measured in free air; max. air pressure is measured at close to zero air flow.

* Noise is measured in anechoic chamber in free air, one meter from intake side.

* All readings are typical values at rated voltage.

* Specifications are subject to change without notice.