


120x120x25mm DC Golf Fan P/Q Curves (At rated speed)

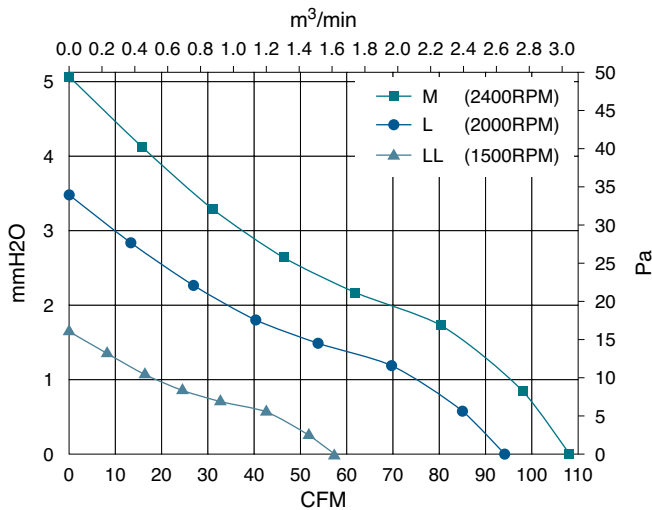

DC Golf Fan

120 x 120 x 25 mm Golf II Version 3 Pin

- Bearing Type
 - Ball bearing
 - Sleeve bearing
- Electrical Function
 - Frequency Generator Output Signal
 - RD (Lock Detection) Output Signal
- Material
 - Impeller: Plastic (PBT 30%GF)
 - Frame: Plastic (PBT 30%GF)
- Lead wires
 - UL1007 24AWG or Equivalent
 - Black Wire Negative (-)
 - Red or Yellow Wire Positive (+)
 - White Wire Signal (FG)
- Weight: 153g (5.40 oz)

MODEL	Operating Voltage Range	Rated Voltage	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
Part No.	VDC	VDC	Amp	Watts	R.P.M	m ³ /min	CFM	mmH ₂ O	Pa	dB(A)
B/S1202512MI-3M	6V ~13.8V	12	0.38	4.6	2400±10%	3.06	108.17	5.05	49.52	40.9
B/S1202512LI-3M	6V ~13.8V	12	0.30	3.6	2000±10%	2.66	93.96	3.47	36.40	34.3
B/S1202512LLI-3M	7V ~13.8V	12	0.30	3.6	1500±10%	1.62	57.23	1.64	16.08	25.6

* Function type is optional.
 * The max. air flow and speed are measured in free air; max. air pressure is measured at close to zero air flow.
 * Noise is measured in anechoic chamber in free air, one meter from intake side.
 * All readings are typical values at rated voltage.
 * Specifications are subject to change without notice.